

Model CS series

Micro Sensor Probes

Model CS series probes are small surface temperature sensors designed to measure the temperature of stationary surface. Specific components may be combined to customize products for the needs of a customer's specific applications.

CS模式系列


CS模式系列产品是适用于微小静止表面温度测试的温度感应器。通过组合各个规格的组件，可以按照客户的用途进行个性选配。

モデルCSシリーズは、微小静止表面の温度計測に適した温度センサです。

各パーツの仕様を組み合わせる事により、お客様の用途に合わせてカスタマイズする事が出来ます。


Typical probes of CS series

Type K Model CS-01K-010-1-TC1-ANP Type E Model CS-01E-010-1-TC1-ANP

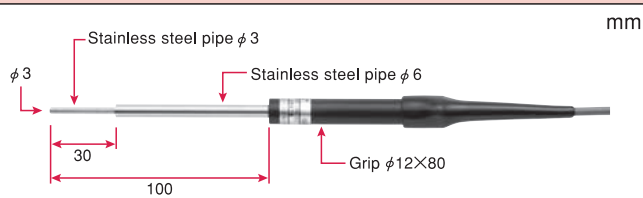


Temp. range	Tolerance	Response time	Durability
-50~400°C	±3.0°C (at 100°C surface)	3 s	A

Type K Model CS-03K-010-1-TC1-ANP Type E Model CS-03E-010-1-TC1-ANP

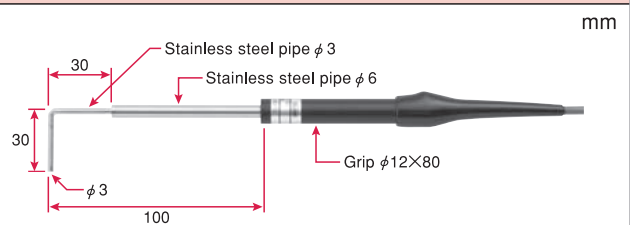


Temp. range	Tolerance	Response time	Durability
-50~400°C	±3.0°C (at 100°C surface)	3 s	A

Type K Model CS-11K-010-1-TC1-ANP Type E Model CS-11E-010-1-TC1-ANP

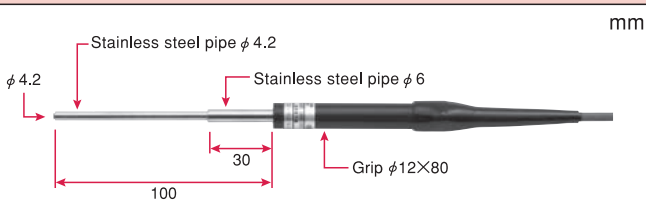


Temp. range	Tolerance	Response time	Durability
-50~400°C	±2.5°C (at 100°C surface)	2 s	A

Type K Model CS-13K-010-1-TC1-ANP Type E Model CS-13E-010-1-TC1-ANP

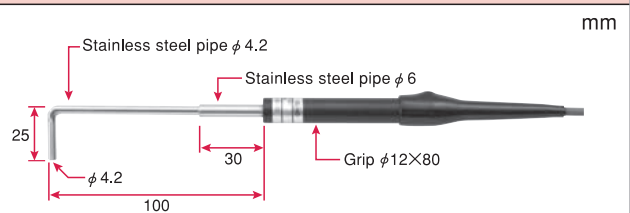


Temp. range	Tolerance	Response time	Durability
-50~400°C	±2.5°C (at 100°C surface)	2 s	A

Type K Model CS-21K-010-1-TC1-ANP Type E Model CS-21E-010-1-TC1-ANP

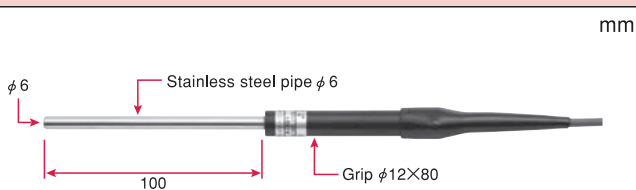


Temp. range	Tolerance	Response time	Durability
-50~400°C	±2.5°C (at 100°C surface)	2 s	A

Type K Model CS-36K-010-1-TC1-ANP Type E Model CS-36E-010-1-TC1-ANP

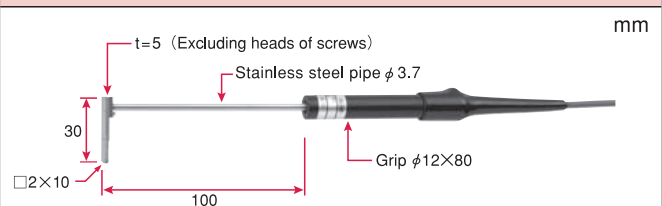

Temp. range	Tolerance	Response time	Durability
-50~400°C	±2.5°C (at 100°C surface)	2 s	A

How to order of CS series

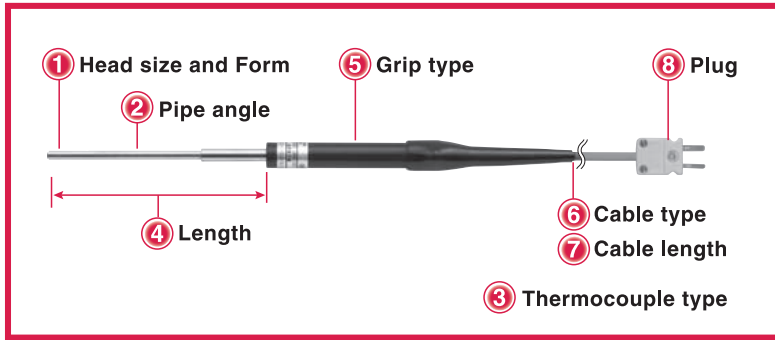

CS-11K-010-1-TC1-ANP



① Head size and Form	0 : ϕ 3.0mm 1 : ϕ 4.2mm 2 : ϕ 6.0mm 3 : \square 2×10mm
② Pipe angle	1 : Straight 3 : 90 degrees 6 : 90 degrees* *Element direction of right angle
③ Thermocouple type	K : Chromel-Alumel E : Chromel-Constantan
④ Length	005 : 50mm 010 : 100mm 015 : 150mm
⑤ Grip type	0 : No grip 1 : Standard grip
⑥ Cable type (See page 5)	TS : For No grip type TC : For Standard grip type
⑦ Cable length	1 : 1m 1.5 : 1.5m 2 : 2m 2.5 : 2.5m
⑧ Plug (See page 4)	ANP ASP W

Specifications

Tolerance	CS-0*	\pm 3.0°C (at 100°C surface)
	CS-1*, CS-2*, CS-3*	\pm 2.5°C (at 100°C surface)
Response time	CS-0*	3.0 s
	CS-1*, CS-2*, CS-3*	2.0 s
Durability rank	A	
Max. temp.	400°C	

② Pipe angle

(mm)

CS-01	
CS-11	
CS-21	
CS-31	
CS-03	
CS-13	
CS-23	
CS-33	
CS-36	

※ No grip, ϕ 6 pipe length will be 50 mm.

④ Length

(mm)

		005	010	015
	CS-01	50mm*	100mm	150mm
	CS-11	50mm*	100mm	150mm
	CS-21	50mm	100mm	150mm
	CS-31	—	100mm*	150mm
	CS-03	50mm*	100mm	150mm
	CS-13	50mm*	100mm	150mm
	CS-23	50mm	100mm	150mm
	CS-33	50mm*	100mm	150mm
	CS-36	50mm*	100mm	150mm


※ means that the probe without a grip is not available.

⑤ Grip type

No grip	For device, system, auto-machines, mechanical system etc
Standard grip	For handheld measurement

① Head size and Form

You can choose head size and form as below.

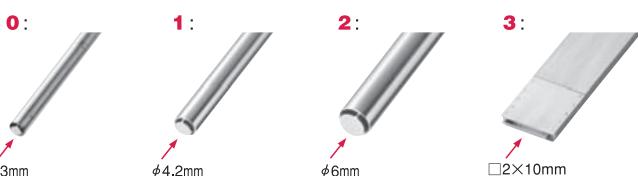

.....