



Type E model : **STN-11E-010**  
Type K model : **STN-11K-010**

Temp.range 测试范围	Tolerance 精度	Response time 响应速度
-50~210°C *1	±2.5°C (at 100°C) (在 100°C)	2s

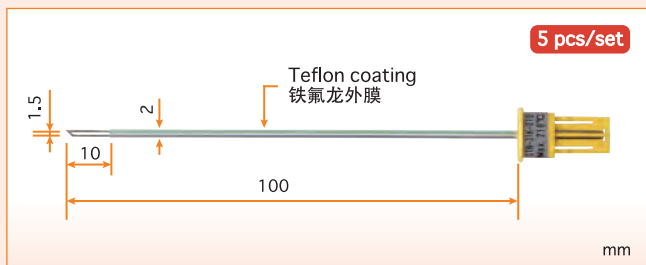


Type E model : **STN-31E-010**  
Type K model : **STN-31K-010**

Temp.range 测试范围	Tolerance 精度	Response time 响应速度
-50~210°C *1	±2.5°C (at 100°C) (在 100°C)	2s

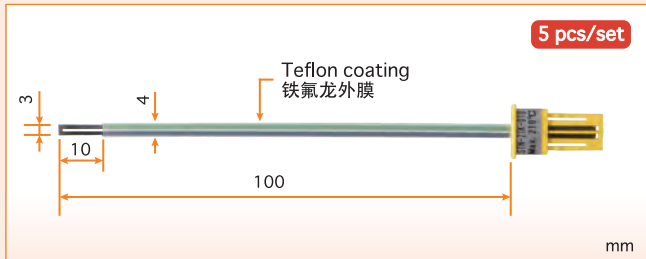

Type E model : **STN-21E-010**  
Type K model : **STN-21K-010**

Temp.range 测试范围	Tolerance 精度	Response time 响应速度
-50~210°C *1	±2.5°C (at 100°C) (在 100°C)	2s

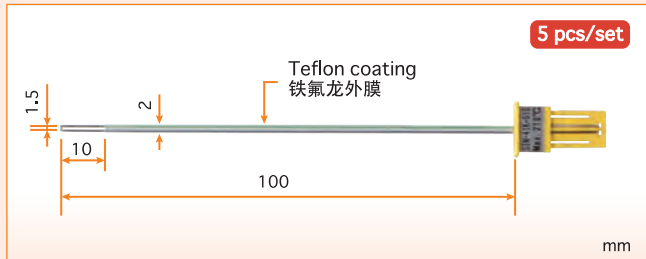


Type E model : **STN-41E-010**  
Type K model : **STN-41K-010**

Temp.range 测试范围	Tolerance 精度	Response time 响应速度
-50~210°C *1	±2.5°C (at 100°C) (在 100°C)	2s



Type E model : **STN-12E-015**  
Type K model : **STN-12K-015**

Temp.range 测试范围	Tolerance 精度	Response time 响应速度
-50~210°C *1	±2.5°C (at 100°C) (在 100°C)	8s

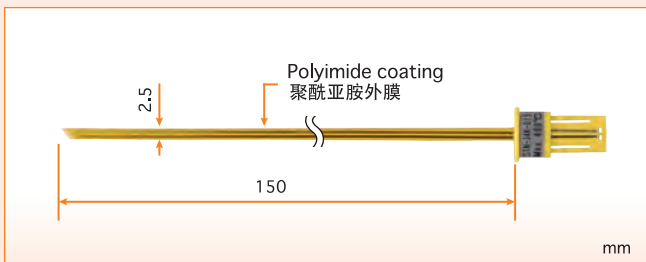

Type E model : **STN-34E-015**  
Type K model : **STN-34K-015**

Temp.range 测试范围	Tolerance 精度	Response time 响应速度
-50~400°C *1	±2.5°C (at 100°C) (在 100°C)	8s

How to order 如何选择

Tape part 胶带部

**STN-11K-010**

① ② ③ ④

① Tape width and shape 胶带宽度和先端形状	1	Standard type: Sharp 标准型 尖形
	2	Standard type: Flat 标准型 平形
	3	Narrow type: Sharp 窄窄型 尖形
	4	Narrow type: Flat 窄窄型 平形
② Coating type and operating temperature range 包膜形状和使用温度范围	1	Low temperature: Teflon coating (open)
	2	Low temperature: All Teflon coating
	3	High temperature: Polyimide coating (open)
	4	High temperature: All Polyimide coating
③ Thermocouple type 热电偶型号	E	Chromel-Constantan
	K	Chromel-Alumel
④ Tape length 胶带的长度	005	50mm
	010	100mm
	015	150mm



Type E model : **STN-43E-010**  
Type K model : **STN-43K-010**

Temp.range 测试范围	Tolerance 精度	Response time 响应速度
-50~400°C *1	±2.5°C (at 100°C) (在 100°C)	2s


How to order 如何选择

Extension cable 延长导线

**STN-K-TS1-ANP**

① ② ③

① Thermocouple type 热电偶型号	E	Chromel-Constantan
	K	Chromel-Alumel
② Cable type 导线型号	TS	Standard cable
② Cable length 导线长度	1	1m
	1.5	1.5m
③ Plug 插件型号	ASP	Anritsu standard plug
	ANP	Miniature plug
	W	Without plug
	WT3	Spade terminal for φ3mm
	WT4	Spade terminal for φ4mm
	WT5	Spade terminal for φ5mm
	WC3	Ring terminal for φ3mm
	WC4	Ring terminal for φ4mm
	WC5	Ring terminal for φ5mm

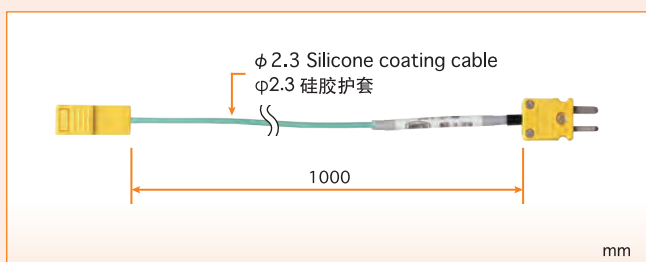

Type E model : **STN-E-TS1-ANP**  
Type K model : **STN-K-TS1-ANP**

\*1 Make sure to refer to the notes about the operating temperature range for the Model STN series probes. These notes are listed in the back of this catalog. STN 系列的使用温度范围注意事项记载在卷尾, 请务必参照。