

Micro sensor probes (Thin head type)

Type K Model **310K-TC1-ANP**
Type E Model **310E-TC1-ANP**



mm

Temp. range	Tolerance	Response time	Durability
-50~250°C	±2.5°C (at 100°C surface)	0.5 s	B

Type K Model **343K-TC1-ANP**
Type E Model **343E-TC1-ANP**



mm

30° -Pipe angle type

Temp. range	Tolerance	Response time	Durability
-50~250°C	±2.5°C (at 100°C surface)	0.5 s	B

Micro sensor probes (for large heat-capacity)

Type K Model **345K-TC1-ANP**
Type E Model **345E-TC1-ANP**



mm

Temp. range	Tolerance	Response time	Durability
-50~600°C	±2.5°C (at 100°C surface)	2.5 s	B

Type K Model **346K-TC1-ANP**
Type E Model **346E-TC1-ANP**



mm

Temp. range	Tolerance	Response time	Durability
-50~600°C	±2.5°C (at 100°C surface)	2.5 s	B

High temperature probes

Model **619K-010-TC1-ANP**
L



mm

Temp. range	Tolerance	Response time	Durability
-50~1200°C	±2.5°C (at 100°C surface)	15 s	B


Model **620K-010-TC1-ANP**
L



mm

Temp. range	Tolerance	Response time	Durability
-50~1200°C	±2.5°C (at 100°C surface)	15 s	B

Model **621K-010-TC1-ANP**
L

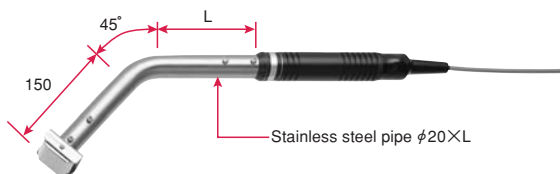

mm

Temp. range	Tolerance	Response time	Durability
-50~1200°C	±2.5°C (at 100°C surface)	15 s	B

Specify the pipe length "L".

L	Pipe length
010	100mm
020	200mm
030	300mm
050	500mm
100	1000mm

※ These probes are suitable for high temperature measurement of stationary metallic surface.