

Higher Quality, More Space -Stacking Temp/Humidity Chamber

- ✓ Small Footprint – Space Saving
- ✓ Economical Price
- ✓ Simple Installation
- ✓ Maintenance Free
- ✓ Low consumption



HIFLEX **NEO** **S**
SERIES

	W20 x H14 x D14"		W24 x H24 x D20"	
-40 to + 150 C (-40 to +302 F) 20 to 98 % RH	1 room	SXN401	-	
	2 rooms	SXN402	2 rooms	SXN412
	3 rooms	SXN403	-	
-40 to + 150 C (-40 to +302 F)	1 room	SLN401	-	
	2 rooms	SLN402	2 rooms	SLN412
	3 rooms	SLN403	-	

As cable ports are on each side, easy to move the measurement devices.



100 x 300 mm

Easy to clean up and add water to the 10L tank.

*For SXN403 and SXN412, it will be 20L.




Easy Maintenance

Easy to keep air clean. The dust filter can easily take out / re-install.



Auto-Water Cleaning System
UV lamp in the tank sterilizes the water for humidification.

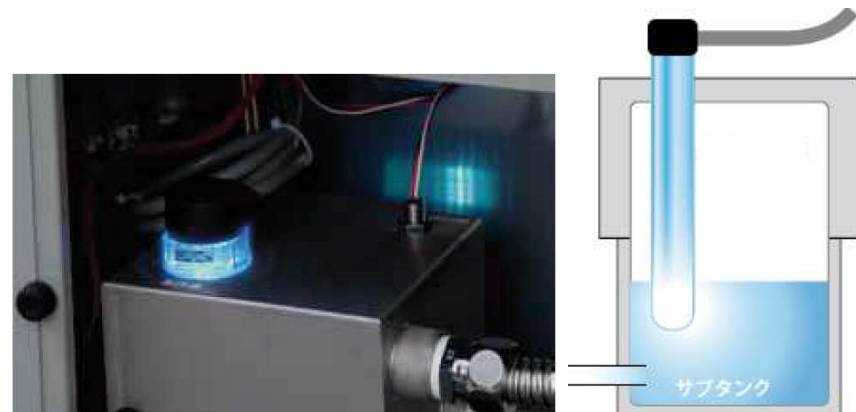



Test program downloads / Easy Trouble Shooting

Ethernet connection enables to control the chamber operation and modify the settings online (web browser).

You can operate from your PC, smartphone or tablet. Test data is automatically and constantly saved to the built-in memory during operation.

Space Saving

Comparing standard temperature and humidity chambers (model# FX411N), 80% of installation space will be saved when three chambers installed.

This also saves installation costs such as DI water system and power supply.

